DATASHEET

4PIN DIP TYPE FORM A SSR
EL4XXA-G SERIES DATASHEET



Schematic



Pin Configuration
1, LED Anode
2, LED Cathode
3.4, MOSFET

Features

•Compliance Halogens Free (Br < 900ppm, Cl < 900ppm, Br+Cl < 1500ppm)
•Compliance with EU REACH.
•The product itself will remain within RoHS compliant version
• Normally open signal pole signal throw relay
• Low operating current
• 60 to 600V output withstand voltage
• Low on resistance
• Wide operating temperature range of -40°C to 85°C
• High isolation voltage between input and output (Viso = 5000 Vrms)
•The product itself will remain within RoHS compliant version
• Compliance with EU REACH
• UL 1577 + cUL approved (No. E214129)
• UL 508 + cUL approved (No. E348721)
• VDE approved (No. 40028391)
• SEMKO approved
• NEMKO approved
• DEMKO approved
• FIMKO approved
• CQC approved

Description

The EL406A, EL425A, EL440A and EL460A are solid state relays containing an AlGaAs infrared LEDs on the light emitting side (input side) optically coupled to a high voltage output detector circuit. The detector consists of a photovoltaic diode array and MOSFETs on the output side. The single channel configuration is equivalent to 1 form A EMR. They are packaged in 4 pin DIP and available in surface mount SMD option.

Applications

• Exchange equipment
• Measurement equipment
• FA/OA equipment
• Industrial controls, Security

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Ver.:4 Release Date:08/13/2019 狀態:Approved(正式發行)

Absolute Maximum Ratings (T_A=25 °C, unless otherwise specified)

Parameter		Symbol	Rating				Unit
			EL406A	EL425A	EL440A	EL460A	
Input	Forward Current	I_F	50				mA
	Reverse Voltage	V_R	5				V
	Peak Forward Current*1	I_{FP}	1				A
	Power Dissipation	P_{in}	75				mW
Output	Break Down Voltage*2	V_L	60	250	400	600	V
	Continuous Load Current	I_L	550	150	120	50	mA
	Pulse Load Current*3	I_{LPeak}	1.2	0.5	0.3	0.15	A
	Power Dissipation	P_{out}	500				mW
Total Power Dissipation		P_T	550				mW
Isolation Voltage*4		V_{iso}	5000				Vrms
Storage Temperature		T_{STG}	-40 to 125				°C
Operating Temperature		T_{OPR}	-40 to 85				°C
Soldering Temperature*5		T_{SOL}	260				°C

Notes:
*1. f =100Hz, Duty Cycle = 0.1%
*2. Indicate the DC and peak AC values
*3. A connection: 100 ms (1 shot), V_L = DC or peak AC
*4. AC for 1 minute, R.H. = 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.
*5. For 10 seconds

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Electro-Optical Characteristics (T_A=25 °C)

	Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage		V_F	I_F = 10mA	-	1.18	1.5	V
	Reverse Current		I_R	V_R = 5V	-	-	1	μA
Output	Off State leakage Current		I_{leak}	I_F = 0mA, V_L = Max.	-	-	1	μA
	On Resistance	EL406A	$R_{d(ON)}$	I_F = 10mA, I_L = Max. t = 1s	-	0.7	2.5	Ω
		EL425A			-	6.5	15	
		EL440A			-	20	30	
		EL460A			-	40	70	
	Output Capacitance	EL406A	C_{out}	V_L = 0V, f = 1MHz	-	85	-	pF
		EL425A			-	60	-	
		EL440A			-	45	-	
		EL460A			-	30	-	
Transfer Characteristics	LED turn on Current	EL406A	$I_{F(on)}$	I_L = Max.	-	3	5	mA
		EL425A						
		EL440A						
		EL460A						
	LED turn off current	EL406A	$I_{F(off)}$	I_L = Max.	0.4	3	-	mA
		EL425A						
		EL440A						
		EL460A						
	Turn On Time	EL406A	T_{on}	I_F = 10 mA, I_L = Max. R_L = 200Ω ,	-	1.4	3	ms
		EL425A						
		EL440A						
		EL460A						
	Turn Off Time	EL406A	T_{off}		-	0.05	0.5	ms
		EL425A						
		EL440A						
		EL460A						
	Isolation Resistance		R_{I-O}	V_{I-O} = 500V DC	5×10^{10}	-	-	Ω
	Isolation Capacitance		C_{I-O}	V = 0V, f = 1MHz	-	1.5	-	pF

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Typical Electro-Optical Characteristics Curves

Figure 1-1. Load current vs Ambient temperature

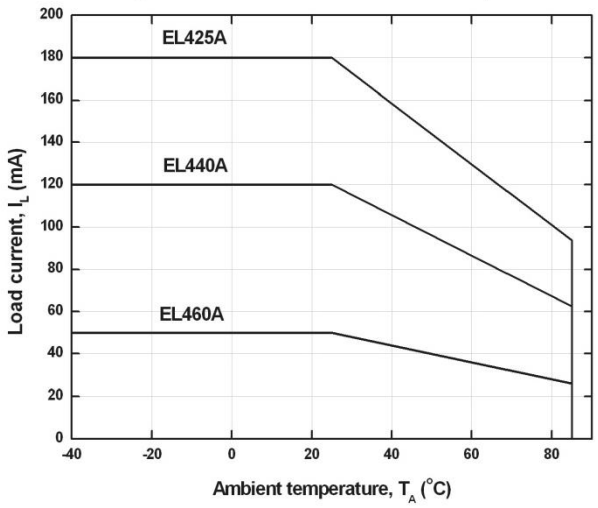

Figure 1-2. Load current vs Ambient temperature

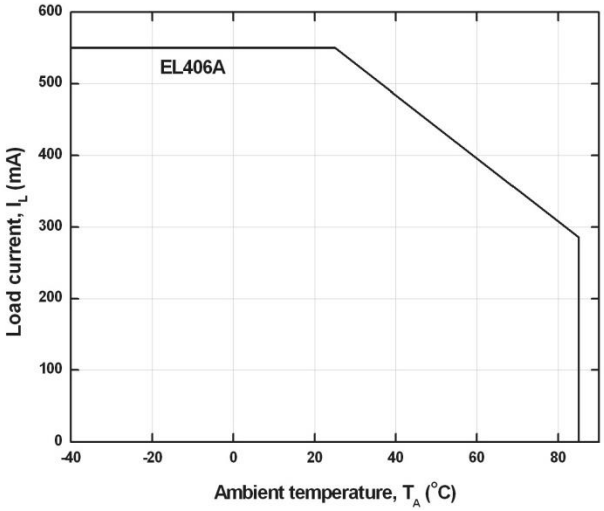

Figure 2-1. On Resistance vs Ambient Temperature

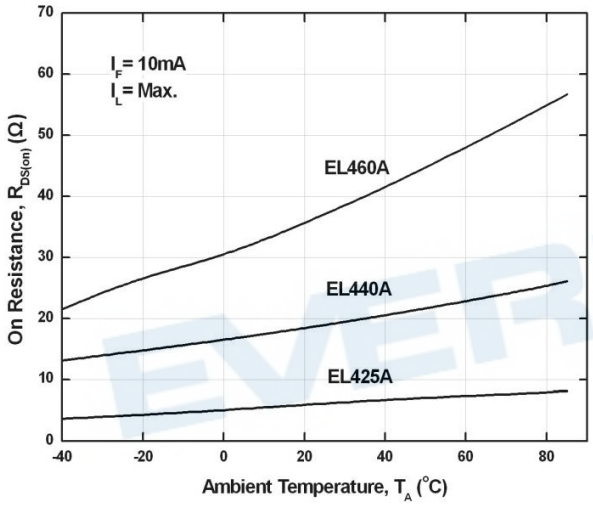

Figure 2-2. On Resistance vs Ambient Temperature

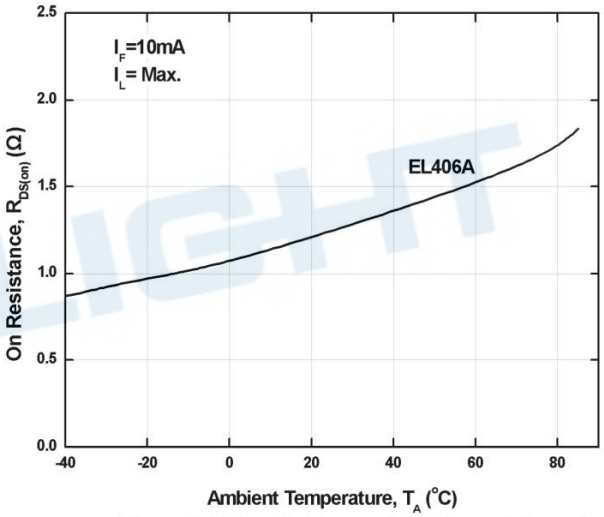

Figure 3. Switching Time vs Ambient Temperature

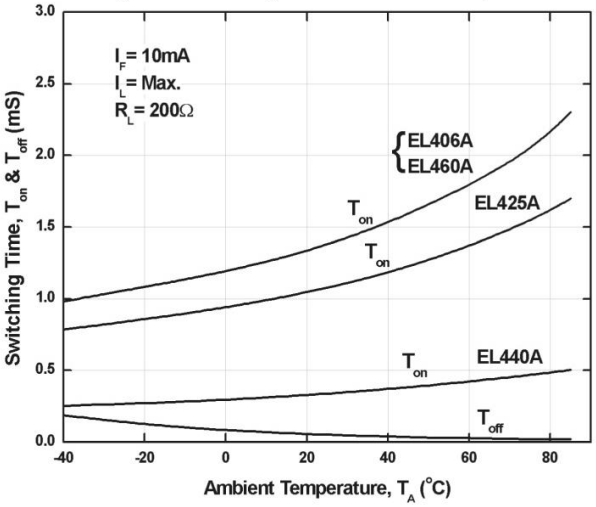

Figure 4-1. Turn On Time vs LED Forward Current

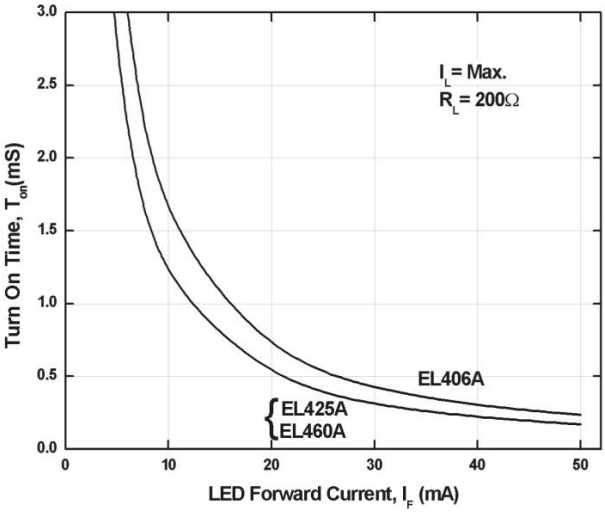

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Figure 4-2. Turn On Time vs LED Forward Current

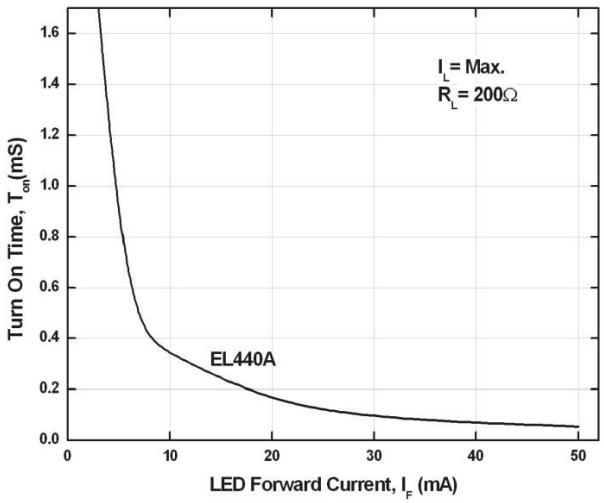

Figure 5. Turn Off Time vs LED Forward Current

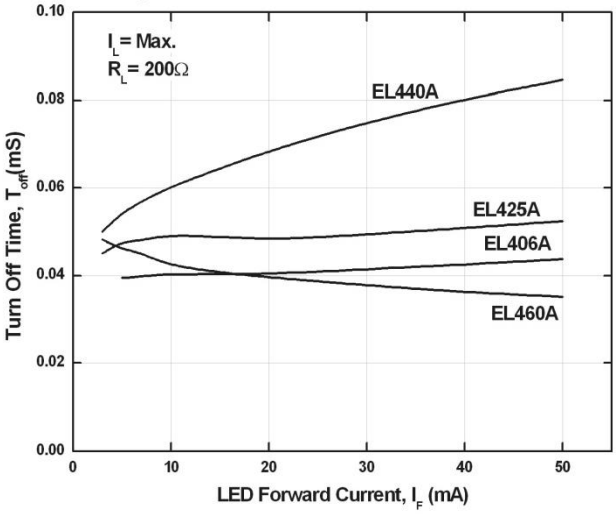

Figure 6. Normalized LED Operate on Current vs Ambient Temperature

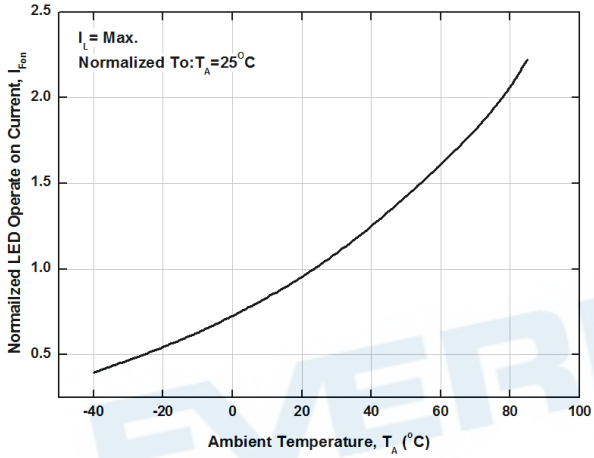

Figure 7. Normalized LED Turn off Current vs Ambient Temperature

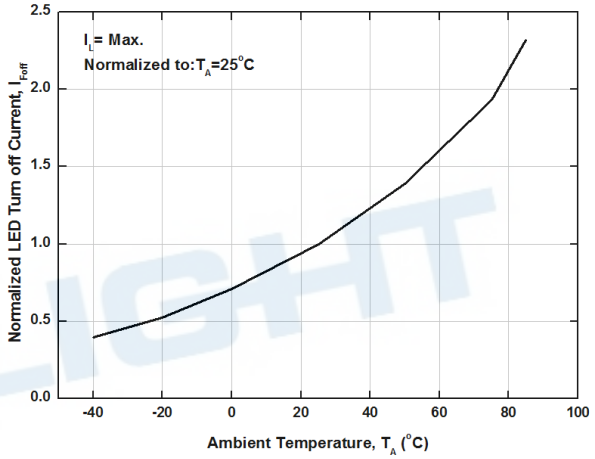

Figure 8. LED Dropout Voltage vs Ambient Temperature

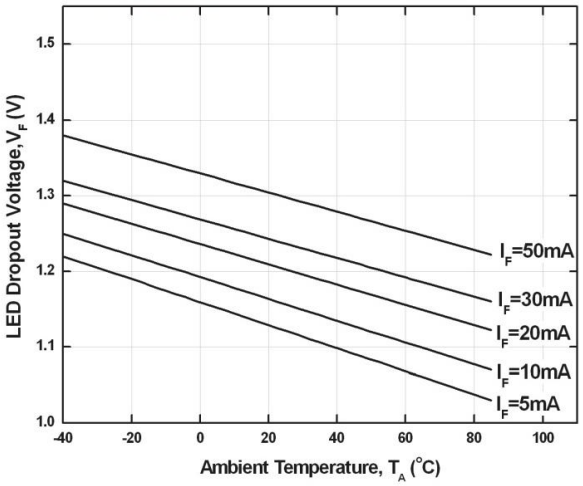

Figure 9-1. Load Voltage vs Load Current

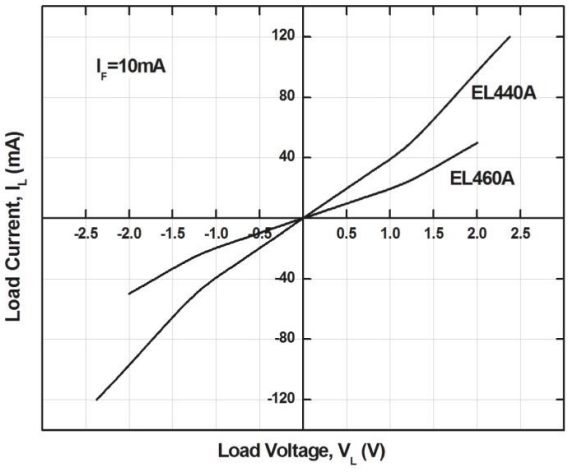

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4
www.everlight.com

Figure 9-2. Load Voltage vs Load Current

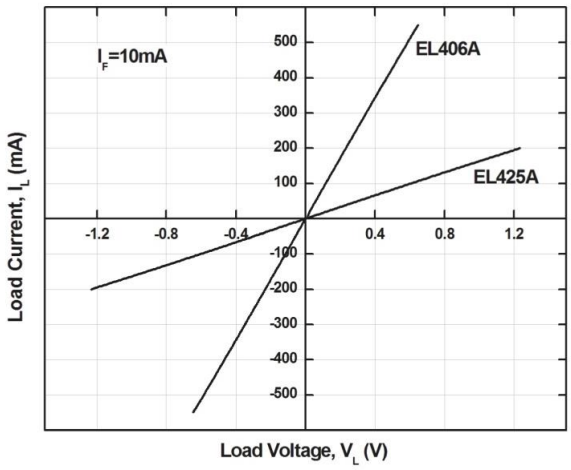

Figure 10. Off State Leakage Current vs Load Voltage

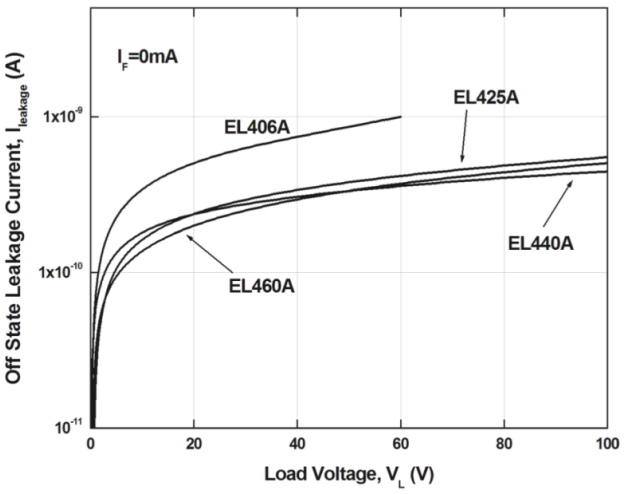

Figure 11. Applied Voltage VS Output Capacitance

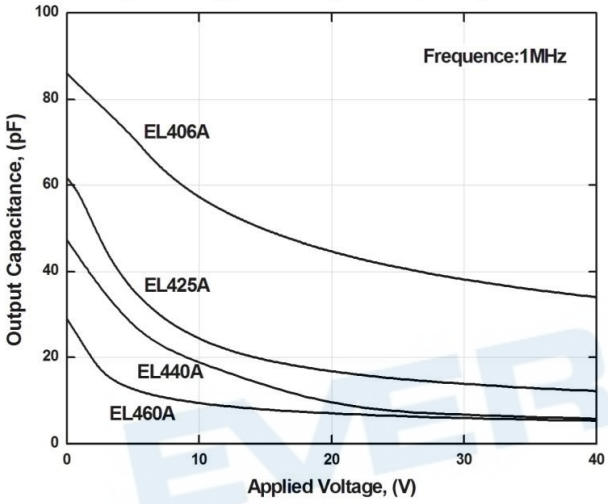

EVERLIGHT

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Order Information

Part Number

EL4XXA(Y)(Z)-VG

Note:
XX = Part No. (06, 25, 40 or 60)
Y = Lead form option (S1, or none)
Z = Tape and reel option (TA, TB, TU, TD or none).
V = VDE safety approved option
G = Halogens free

Option	Description	Packing quantity
None	Standard DIP-4	100 units per tube
M	Wide lead bend (0.4 inch spacing)	100 units per tube
S1 (TA)	Surface mount lead form (low profile) + TA tape & reel option	1000 units per reel
S1 (TB)	Surface mount lead form (low profile) + TB tape & reel option	1000 units per reel
S1 (TU)	Surface mount lead form (low profile) + TU tape & reel option	1500 units per reel
S1 (TD)	Surface mount lead form (low profile) + TD tape & reel option	1500 units per reel

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Package Dimension
(Dimensions in mm)

Standard DIP Type

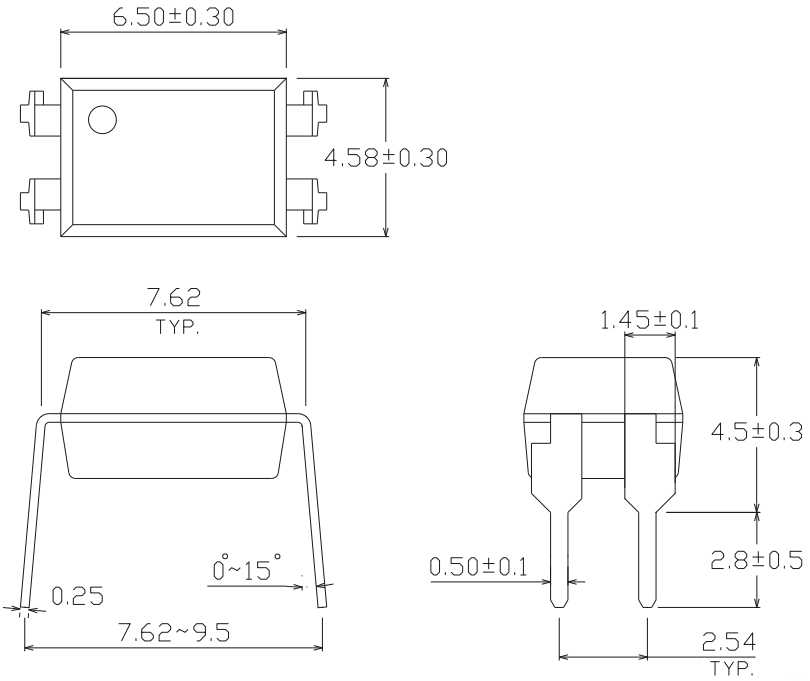

Option M Type

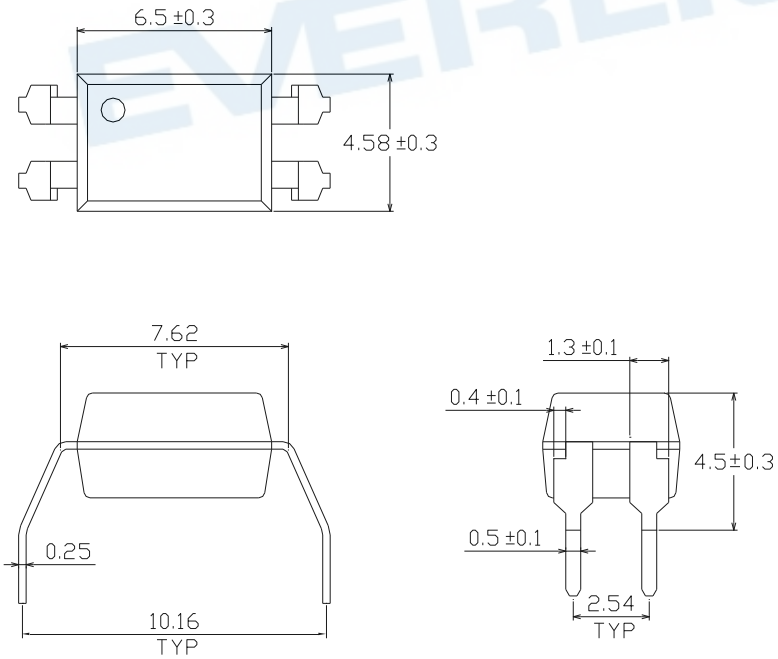

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Option S1 Type

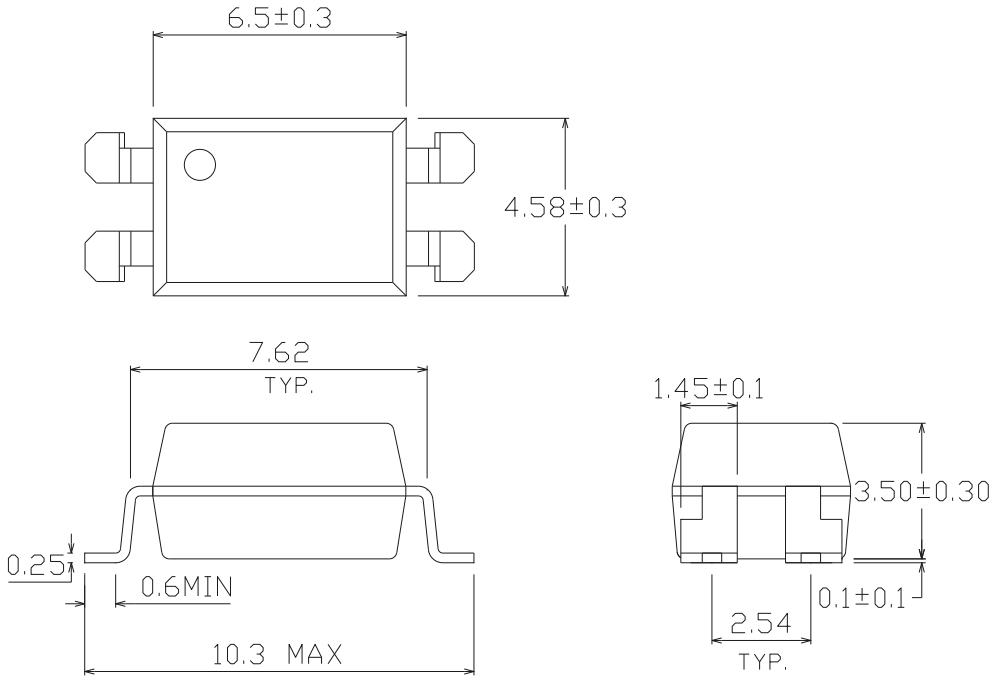

Recommended Pad Layout for Surface Mount Leadform

4Pin SMD

For S1 option

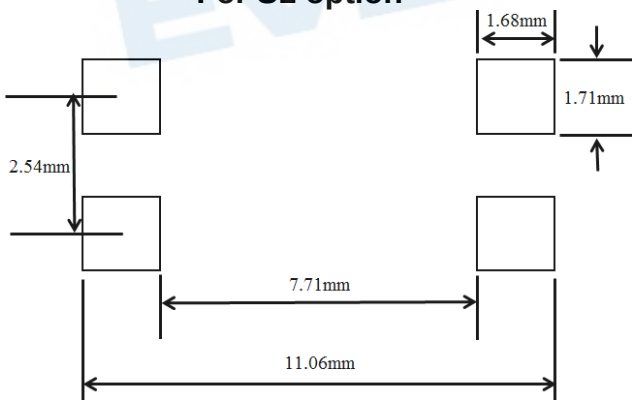

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Device Marking

Notes

EL	denotes Everlight
460A	denotes Part Number
G	denotes Green Part
Y	denotes 1 digit Year code
WW	denotes 2 digit Week code
V	denotes VDE option

EVERLIGHT

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Tape & Reel Packing Specifications

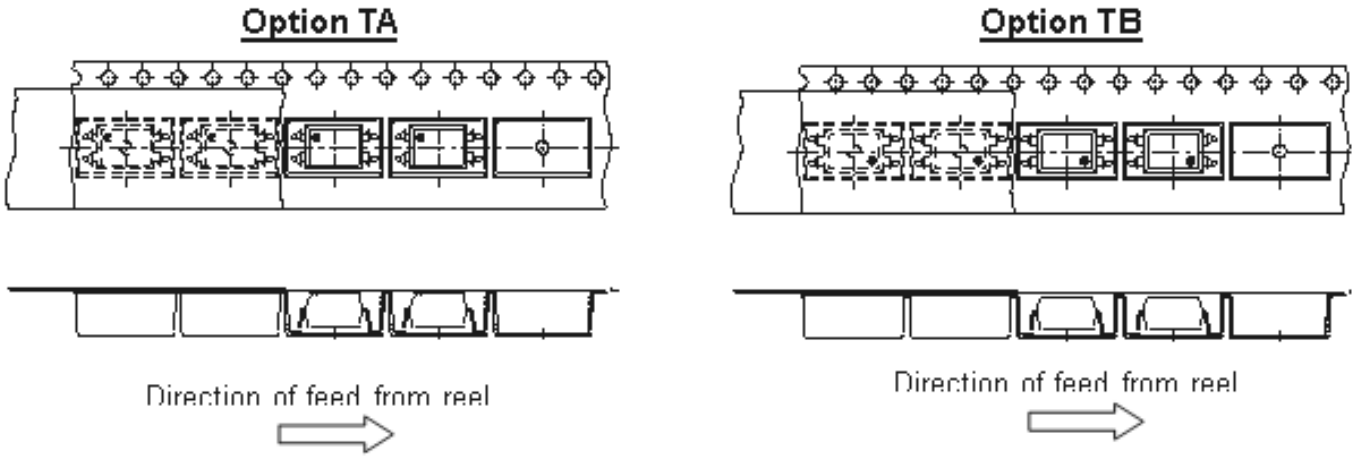

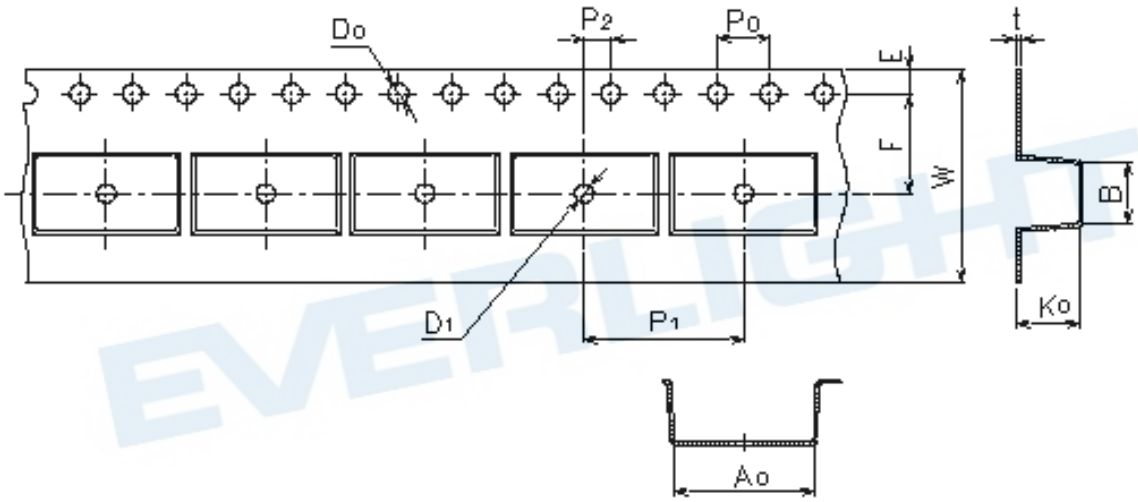

Dimension No.	**A0**	**B**	**Do**	**D1**	**E**	**F**
Dimension (mm) S1	10.7±0.1	4.65±0.1	1.5±0.1	1.50±0.1	1.75±0.1	7.5±0.1
Dimension No.	**Po**	**P1**	**P2**	**t**	**W**	**K0**
Dimension (mm) S1	4.0±0.1	12.0±0.1	2.0±0.1	0.4±0.1	16.0±0.3	3.90±0.1

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Option TU

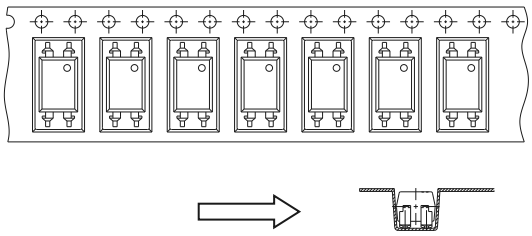

Direction of feed from reel

Option TD

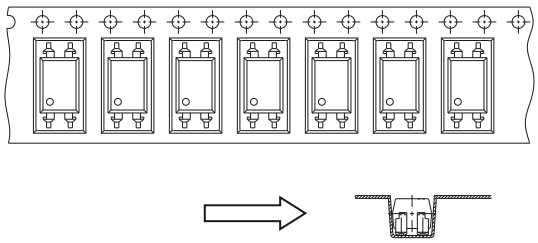

Direction of feed from reel

Tape Dimensions

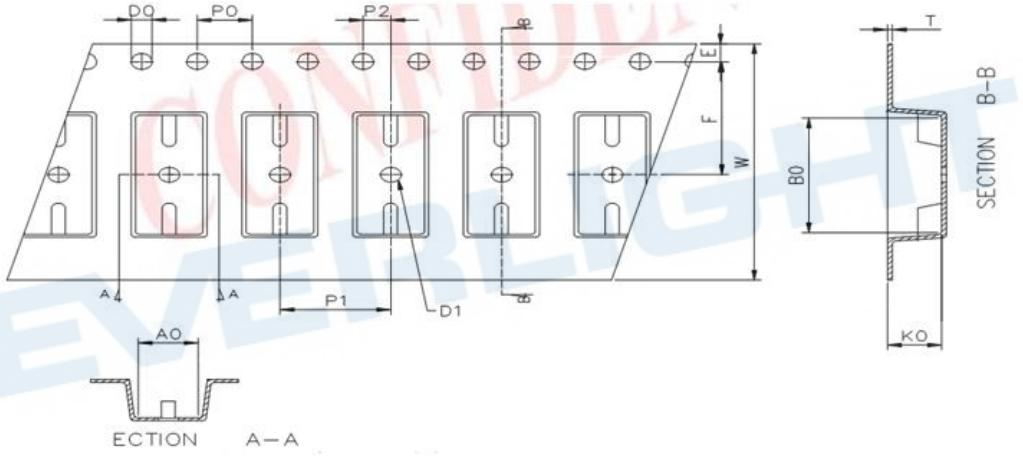

Dimension No.	**Ao**	**Bo**	**Do**	**D1**	**E**	**F**
Dimension(mm) S1	4.90±0.1	10.40±0.1	1.5±0.1	1.50±0.1	1.75±0.1	7.50±0.1
Dimension No.	**Po**	**P1**	**P2**	**t**	**W**	**Ko**
Dimension(mm) S1	4.00±0.1	8.00±0.1	2.00±0.1	0.40±0.1	16.00±0.3	4.60±0.1

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

Precautions for Use

1. Soldering Condition

1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

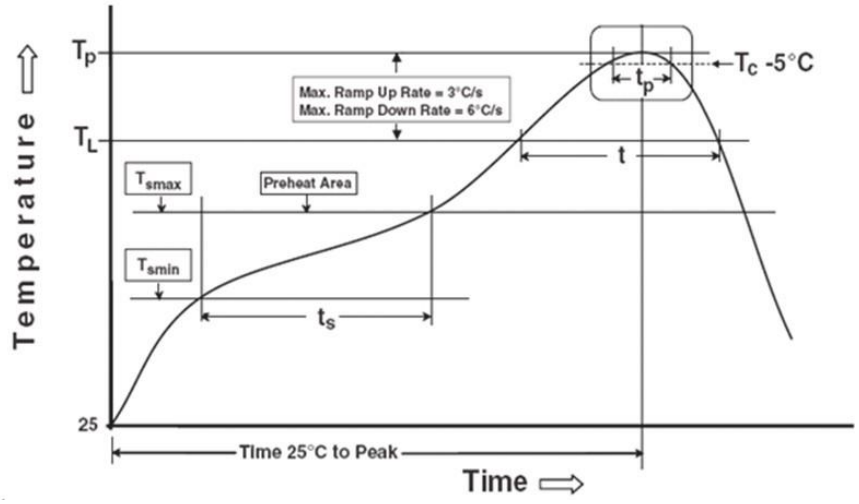

Note:	Reference: IPC/JEDEC J-STD-020D
Preheat	
Temperature min (T_{smin})	150 °C
Temperature max (T_{smax})	200°C
Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds
Average ramp-up rate (T_{smax} to T_p)	3 °C/second max
Other	
Liquidus Temperature (T_L)	217 °C
Time above Liquidus Temperature (t_L)	60-100 sec
Peak Temperature (T_P)	260°C
Time within 5 °C of Actual Peak Temperature: T_P - 5°C	30 s
Ramp- Down Rate from Peak Temperature	6°C /second max.
Time 25°C to peak temperature	8 minutes max.
Reflow times	3 times

.

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 8, 2019. Issue No: DPC-0000424 Rev.4